

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of)	
Gilbert Blanchard)	Group Art Unit: 1797
Application No.: 10/551,914)	Examiner: Chantel L. Ferguson
Filed: September 30, 2005)	Confirmation No.: 8372
For: COLLOIDAL DISPERSION OF A RARE)	
EARTH COMPOUND COMPRISING AN ANTI-)	
OXIDANT AGENT AND USE THEREOF AS)	
ADDITIVE FOR DIESEL FUEL FOR INTERNAL)	
COMBUSTION ENGINES)	

SUBMISSION OF CERTIFIED ENGLISH TRANSLATION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450


Sir:

Submitted herewith is a certified English translation of French priority document No. 03 04226 filed April 4, 2003. The benefit of the filing date of this foreign application is hereby perfected. Said foreign application is referred to in the Combined Declaration for Patent Application and Power of Attorney. Acknowledgement of receipt of the certified copy is requested.

Respectfully submitted,

BUCHANAN INGERSOLL & ROONEY PC

Date: November 20, 2009

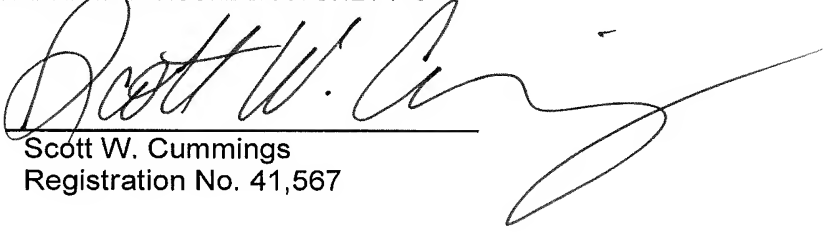By: 
Scott W. Cummings
Registration No. 41,567

Customer No. 21839
703 836 6620

UNITED STATES PATENT AND TRADEMARK OFFICE

I, Neil Thomas SIMPKIN BA,

Deputy Managing Director of RWS Group Ltd UK Translation Division, of Europa House, Marsham Way, Gerrards Cross, Buckinghamshire, England declare;

1. That I am a citizen of the United Kingdom of Great Britain and Northern Ireland.
2. That the translator responsible for the attached translation is well acquainted with the French and English languages.
3. That the attached is, to the best of RWS Group Ltd knowledge and belief, a true translation into the English language of the accompanying copy of the specification filed with the application for a patent in France on 4 April 2003 under the number 03/04,226 and the official certificate attached thereto.
4. That I believe that all statements made herein of my own knowledge are true and that all statements made on information and belief are true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application in the United States of America or any patent issuing thereon.



For and on behalf of RWS Group Ltd

The 13th day of November 2009



Patent

Utility Certificate

OFFICIAL COPY

The Director-General of the Institut National de la Propriété Industrielle certifies that the attached document is a true copy of an application for industrial property titleright filed at the Institute.

Drawn up in Paris, 27 OCT. 2009

On behalf of the Director-General of the
Institut National de la Propriété Industrielle
The Patent Department Head

[signature]

Martine PLANCHE

REQUEST FOR GRANT 1/2

This form is to be filled in legibly in black ink

DB 540 W / 260899

SUBMISSION OF DOCUMENTS DATE 4 APRIL 2003 PLACE 75 INPI PARIS NATIONAL REGISTRATION No. 03/04,226 ASSIGNED BY THE INPI DATE OF FILING ASSIGNED BY THE INPI 04 APR. 2003		Reserved for the INPI		1 NAME AND ADDRESS OF THE APPLICANT OR THE REPRESENTATIVE TO WHOM THE CORRESPONDENCE IS TO BE ADDRESSED Philippe DUBRUC RHODIA SERVICES Direction de la Propriété Industrielle 40, rue de la Haie-Coq 93306 AUBERVILLIERS CEDEX	
Your file references: (optional) R 03038					
Confirmation of filing by fax <input type="checkbox"/> No. assigned by the INPI to the fax					
2 NATURE OF THE APPLICATION		Tick one of the 4 following boxes			
Patent application		<input checked="" type="checkbox"/>			
Utility certificate application		<input type="checkbox"/>			
Divisional application		<input type="checkbox"/>			
<i>Initial patent application</i>		No.		Date <input type="text"/> / <input type="text"/> / <input type="text"/>	
<i>or initial utility certificate application</i>		No.		Date <input type="text"/> / <input type="text"/> / <input type="text"/>	
Conversion of a European patent application <i>Initial application</i>		<input type="checkbox"/>		No.	
				Date <input type="text"/> / <input type="text"/> / <input type="text"/>	
3 TITLE OF THE INVENTION (200 characters or spaces maximum) COLLOIDAL DISPERSION OF A RARE EARTH COMPOUND COMPRISING AN ANTI-OXIDANT AGENT AND USE THEREOF AS ADDITIVE FOR DIESEL FUEL FOR INTERNAL COMBUSTION ENGINES					
4 PRIORITY DECLARATION OR APPLICATION FOR THE BENEFIT OF THE FILING DATE OF A PRIOR FRENCH APPLICATION		Country or organisation Date <input type="text"/> / <input type="text"/> / <input type="text"/> No. Country or organisation Date <input type="text"/> / <input type="text"/> / <input type="text"/> No. Country or organisation Date <input type="text"/> / <input type="text"/> / <input type="text"/> No. <input type="checkbox"/> If there are other priorities, tick the box and use the "continuation" form			
5 APPLICANT		<input type="checkbox"/> If there are other applicants, tick the box and use the "continuation" form			
Name or company name		RHODIA ELECTRONICS AND CATALYSIS			
Forenames					
Legal form					
SIREN No.		3.8.0.2.9.3.0.6.8			
APE-NAF Code					
Address	Street	Z.I. - 26, rue Chef de Baie			
	Postcode and town	17041 LA ROCHELLE CEDEX			
Country		FRANCE			
Nationality		French			
Telephone No. (optional)					
Fax No. (optional)					
E-mail address (optional)					

PATENT

UTILITY CERTIFICATE

REQUEST FOR GRANT 2/2

SUBMISSION OF DOCUMENTS		Reserved for the INPI	
DATE		4 APRIL 2003	
PLACE		75 INPI PARIS	
NATIONAL REGISTRATION No.		03/04,226	
ASSIGNED BY THE INPI			
Your file references: (optional)		R 03038	
6 REPRESENTATIVE			
Name		DUBRUC	
Forename		Philippe	
Firm or Company		RHODIA SERVICES Direction de la Propriété Industrielle	
No. of permanent power of attorney and/or contractual arrangement		1st January 2000	
Address	Street	40, rue de la Haie-Coq	
	Postcode and town	93306	AUBERVILLIERS
Telephone No. (optional)		01 53 56 54 09	
Fax No. (optional)		01 53 56 54 10	
E-mail address (optional)			
7 INVENTOR (S)			
The inventors are the applicants		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No In this case, provide a separate designation of the inventor(s)	
8 SEARCH REPORT			
Immediate compilation		<input checked="" type="checkbox"/>	
Deferred compilation		<input type="checkbox"/>	
Fee paid in instalments		Payment in three instalments, for natural persons only <input type="checkbox"/> Yes <input type="checkbox"/> No	
9 REDUCTION OF FEES			
		For natural persons only <input type="checkbox"/> Requested for the first time for this invention (attach notice on non-application) <input type="checkbox"/> Requested prior to filing (attach copy of favourable decision for this invention or indicate its reference)	
If you used the "continuation" form, give the number of attached pages			
10 SIGNATURE OF THE APPLICANT OR REPRESENTATIVE (name and capacity of the signatory) [signature] Philippe DUBRUC		SIGNED FOR THE PREFECTURE OR THE INPI M. MARTIN	

UTILITY CERTIFICATE

Intellectual Property Code - Book VI

PATENTS DEPARTMENT

26 bis, rue de Saint Pétersbourg
75800 Paris Cedex 08
Telephone: 01 53 04 53 04 Fax: 01 42 93 59 30

DESIGNATION OF THE INVENTOR(S) Page No. . 1 . / . 1
(if the applicant is not the inventor or the sole inventor)

This form is to be filled in legibly in black ink

DB 113 W / 260899

Your file references (optional)		R03038	
NATIONAL REGISTRATION NO.		03/04,226	
TITLE OF THE INVENTION (200 characters or spaces maximum) COLLOIDAL DISPERSION OF A RARE EARTH COMPOUND COMPRISING AN ANTI-OXIDANT AGENT AND USE THEREOF AS ADDITIVE FOR DIESEL FUEL FOR INTERNAL COMBUSTION ENGINES			
THE APPLICANT(S): RHODIA ELECTRONICS AND CATALYSIS Z.I - 26, rue Chef de Baie 17041 LA ROCHELLE CEDEX			
DESIGNATE(S) AS INVENTOR(S): (Indicate top right "Page 1/1". If there are more than 3 inventors, use an identical form and number each page, indicating the total number of pages.)			
Name		BLANCHARD	
Forenames		Gilbert	
Address	Street	5, allée des Acacias	
	Postcode and town	60330	LAGNY LE SEC
Employer company (optional)		RHODIA RECHERCHE	
Name			
Forenames			
Address	Street		
	Postcode and town		
Employer company (optional)			
Name			
Forenames			
Address	Street		
	Postcode and town		
Employer company (optional)			
DATE AND SIGNATURE(S) OF THE APPLICANT(S) OR OF THE REPRESENTATIVE (Name and capacity of the signatory) Aubervilliers, 4 April 2003 Philippe DUBRUC [signature]			

COLLOIDAL DISPERSION OF A RARE EARTH COMPOUND
COMPRISING AN ANTI-OXIDANT AGENT AND USE THEREOF AS
ADDITIVE FOR DIESEL FUEL FOR INTERNAL COMBUSTION
5 ENGINES

The present invention relates to a colloidal dispersion of a rare earth compound comprising an
10 antioxidant and its use as diesel fuel additive for internal combustion engines.

It is known that during the combustion of diesel fuel in a diesel engine, the carbonaceous products tend to form soot, which is considered to be harmful both to
15 the environment and to health. For many years, techniques have been sought for reducing the emission of these carbonaceous particles.

One satisfactory solution consists in introducing, into the soot, catalysts permitting frequent
20 autoignition of the soot collected in the filter. For this purpose, this soot must have a sufficiently low autoignition temperature to be frequently reached during normal running of the engine.

It is known that dispersions of rare earth
25 compounds, used as additives for motor fuels, can contribute to reducing the autoignition temperature of the soot.

These dispersions must particularly have high stability, meaning that the rare earth compound must
30 remain in suspension in the fuel and not precipitate when the dispersion is contacted with the fuel. In fact, it has been found that this stability could depend on the quality of the diesel fuel, particularly of the additives that may be included in the
35 composition thereof. It is therefore particularly advantageous to have a dispersion that is stable regardless of the grade of diesel fuel used.

It is an object of the invention to supply such a dispersion.

For this purpose, the dispersion of the invention, which is of the type comprising particles of a rare earth compound, an acid and an organic phase, is characterized in that it further comprises an
5 antioxidant.

The presence of an antioxidant has the advantage of making the stability of the dispersion of the invention independent of the diesel fuel in which it is incorporated.

10 Other features, details and advantages of the invention will appear more completely from a reading of the description that follows, as well as the various concrete but nonlimiting examples provided to illustrate it.

15 For the rest of the description, rare earth means the elements of the group consisting of yttrium and the elements of the Periodic Table with atomic numbers of 57 to 71 inclusive. The Periodic Table of the Elements referred to is the one published in the Supplément au
20 Bulletin de la Société Chimique de France n° 1 (January 1966).

The colloidal dispersions to which the invention can apply are described in greater detail below.

The expression "colloidal dispersion of a rare
25 earth compound" means any system consisting of fine solid particles with colloidal dimensions based on said compound, in suspension in a liquid phase, said particles further possibly containing residual quantities of bound or adsorbed ions such as, for
30 example, nitrates, acetates, citrates or ammoniums. Colloidal dimensions means dimensions between about 1 nm and about 500 nm. It may be noted that in such dispersions the rare earth may be found either completely in the form of colloids, or simultaneously
35 in the form of ions and in the form of colloids.

The rare earth compound is generally an oxide and/or a hydrated oxide (hydroxide).

With respect to the rare earth, this may be more particularly selected from cerium, lanthanum, yttrium,

neodymium, gadolinium, and praseodymium. Preferably, the rare earth is selected from cerium, lanthanum, yttrium and praseodymium.

It may be noted that the colloidal dispersions according to the invention may comprise a compound that may be based on two or more rare earths.

In the case of a compound based on at least two rare earths, said rare earths may have different degrees of oxidation. The oxidation degree of the rare earths is generally equal to 3 or 4.

In the particular case in which the rare earth is cerium, it is mainly in the form of cerium IV. For example, the cerium III content with respect to cerium IV (content expressed by the atomic ratio Ce III/total Ce) is generally no more than 40%. It may vary according to the embodiments of the dispersions used and thus be no more than 5%, more particularly no more than 1%, and even more particularly no more than 0.5%.

According to a particular embodiment of the invention, the colloidal dispersions may also comprise at least one other element (E) selected from the groups IIA, IVA, VIIA, VIII, IB, IIB, IIIB and IVB of the Periodic Table of the Elements.

In this respect, one can mention more particularly iron, copper, strontium, zirconium, titanium, gallium, palladium and manganese.

With respect to the respective proportions of the elements entering into the composition of the compound(s) mentioned previously, in the case of the presence of at least one rare earth with at least one element (E), the proportion of rare earth(s) is preferably at least 10%, more particularly at least 20%, and even more particularly at least 50%, in moles with respect to the total number of moles of rare earth element(s) and of (E) expressed as oxide.

Besides the particles mentioned above, the colloidal dispersion according to the invention comprises at least one acid, advantageously amphiphilic. The acid is more particularly selected


from those comprising at least 6 carbon atoms, even more particularly from 10 to 60 carbon atoms, preferably from 15 to 25 carbon atoms.

These acids may be linear or branched. They may
5 be aryllic, aliphatic or arylaliphatic acids, possibly having other functions provided that these functions are stable in the media in which the dispersions according to the present invention are to be used. Thus, for example, use can be made of aliphatic
10 carboxylic acids, aliphatic sulfonic acids, aliphatic phosphonic acids, alkylarylsulfonic acids and alkylarylphosphonic acids having about 10 to about 40 carbon atoms, whether natural or synthetic. It is obviously possible to use mixtures of acids.



15 Use can also be made of carboxylic acids of which the carbon chain has ketone functions, such as pyruvic acids substituted at alpha of the ketone function. This may also include alpha-halogenocarboxylic acids or alpha-hydroxycarboxylic acids. The chain attached to
20 the carboxylic group may have unsaturations. However, the general tendency is to avoid too many double bonds because cerium catalyzes the crosslinking of the double bonds. The chain may be interrupted by ether or ester functions, provided that the lipophilicity of the chain
25 with the carboxylic group is not excessively altered.

As an example, mention may be made of the fatty acids of tallol, soybean oil, tallow, linseed oil, oleic acid, linoleic acid, stearic acid and isomers thereof, pelargonic acid, capric acid, lauric acid,
30 myristic acid, dodecylbenzenesulfonic acid, ethyl-2-hexanoic acid, naphthenic acid, hexoic acid, toluenesulfonic acid, toluenephosphonic acid, laurylsulfonic acid, laurylphosphonic acid, palmitylsulfonic acid, and palmitylphosphonic acid.

35 In connection with the present invention, the term "amphiphilic acid" may also designate other amphiphilic agents such as, for example, polyoxyethylene phosphate alkyl ethers. This applies to phosphates with the formula:



5 or dialkyl polyoxyethylene phosphates with the formula:



10



in which:

■ R^1 , R^2 , R^3 , identical or different, represent a linear or branched alkyl radical, particularly with 2 to 20 carbon atoms; a phenyl radical; an alkylaryl radical, more particularly an alkyl phenyl radical, particularly with one alkyl chain with 8 to 12 carbon atoms; an arylalkyl radical, more particularly a phenylaryl radical;

■ n is the number of ethylene oxide, that may be between 0 and 12, for example;

■ M represents an atom of hydrogen, sodium or potassium.

The radical R^1 may be in particular a hexyl, octyl, decyl, dodecyl, oleyl, or nonylphenyl radical.

25 Examples of this type of amphiphilic compound that may be mentioned include those marketed with the trade names Lubrosphos® and Rhodafac® sold by Rhodia and particularly the following products:

- Rhodafac® RA 600 polyoxyethylene (C_8-C_{10}) alkyl phosphate ethers

- Rhodafac® RS 710 or RS 410 polyoxyethylene tridecyl phosphate ether

- Rhodafac® PA 35 polyoxyethylene oleocetyl phosphate ether

35 - Rhodafac® PA 17 polyoxyethylene nonylphenyl phosphate ether

- Rhodafac® RE 610 polyoxyethylene nonyl(branched) phosphate ether.

The dispersions of the invention further comprise a liquid phase that is an organic phase and in which the particles are in suspension.

5 Examples of the organic phase that may be mentioned include aliphatic hydrocarbons such as hexane, heptane, octane, nonane, inert cycloaliphatic hydrocarbons such as cyclohexane, cyclopentane, cycloheptane, aromatic hydrocarbons such as benzene, toluene, ethylbenzene, xylenes, liquid naphthenes.
10 Also suitable are petroleum cuts of the Isopar or Solvesso type (trademarks of EXXON), particularly Solvesso 100 which essentially contains a mixture of methylethyl- and trimethylbenzene, Solvesso 150 which contains a mixture of alkylbenzenes, particularly of
15 dimethylbenzene and tetramethylbenzene, and Isopar, which essentially contains C₁₁ and C₁₂ isoparaffinic and cycloparaffinic hydrocarbons. Mention may also be made, among other petroleum cuts, of those of the Petrolink® type produced by Petrolink or of the Isane®
20 type produced by Total.

Also usable as the organic phase are chlorinated hydrocarbons such as chloro- or dichlorobenzene, and chlorotoluene. Ethers and aliphatic and cycloaliphatic ketones, such as, for example, diisopropyl ether,
25 dibutyl ether, methyl ethyl ketone, methyl isobutyl ketone, diisobutyl ketone, mesityl oxide, may be considered.

Esters may be considered, but they have the drawback of the risk of being hydrolyzed. Ethers
30 suitable for use which may be mentioned include those produced by the reaction of acids with C₁ to C₈ alcohols and particularly palmitates of secondary alcohols such as isopropanol. An example that may be mentioned is butyl acetate.

35 Obviously, the organic phase may be based on a mixture of two or more hydrocarbons or compounds of the type described above.

The dispersions according to the invention have a concentration of rare earth compound(s) and, if

applicable, of element E, which can generally be up to 40% by weight of rare earth oxide(s) and of element E oxide with respect to the total weight of the dispersion. Above 40%, the viscosity of the dispersion is liable to be too high, particularly at low temperature. However, it is preferable for this concentration to be at least 5%. Lower concentrations are economically less advantageous because of the volume of liquid phase, which becomes too high.

The proportion between the organic phase and the acid or acids is not critical. The weight ratio between the organic phase and the acid or acids is preferably chosen to be between 0.3 and 2.0.

The dispersions of the invention may also occur according to various specific embodiments.

Thus, according to a first embodiment, the dispersion is such that at least 90% of the particles are single-crystal particles. "Single-crystal" particles means particles which are individualized and consist of a single crystallite (or at least appear to consist of only a single crystallite) when the dispersion is examined by TEM (high-resolution transmission electron microscopy).

The cryo-TEM technique can also be used to determine the state of aggregation of the elementary particles. In this technique, transmission electron microscopy (TEM) is used to observe samples that are kept frozen in their natural medium, which is either water or organic diluents such as aromatic or aliphatic solvents, for example Solvesso and Isopar, or certain alcohols such as ethanol.

The freezing is carried out on thin films 50 to 100 nm thick, either in liquid ethane for the aqueous samples, or in liquid nitrogen for the others.

By cryo-TEM, the state of dispersion of the particles is well preserved and representative of the state present in the natural medium.

According to this embodiment, the particles have a fine and narrow particle size distribution. In fact,

they have a d_{50} of between 1 and 5 nm, preferably between 2 and 3 nm.

In the present description, the particle size distribution characteristics refer to notations of the d_n type where n is a number from 1 to 99. This notation represents the size of the particles such that $n\%$ is the number of said particles having a size smaller than or equal to said size. For example, a d_{50} of 3 nanometers means that 50% by number of the particles are smaller than or equal to 3 nanometers in size.

The particle size distribution is determined by transmission electron microscopy (TEM), conventionally, on a sample previously dried on a carbon membrane supported on a copper grid.

This preparation technique is preferred because it allows better accuracy in measuring the particle size. The zones selected for the measurements are those that display a state of dispersion similar to that observed in cryo-TEM.

The dispersions according to the embodiment just described are described more particularly in EP-A-1210172, to the teaching of which reference can be made.

The dispersions of the invention may also occur according to a second more particular embodiment in which the particles are not larger than 200 nm, these dispersions also having at least one of the following characteristics:

(i) said particles are in the form of aggregates of crystallites of which the d_{80} , advantageously the d_{90} , is not more than 5 nanometers, 90% (by weight) of the aggregates comprising 1 to 5, preferably 1 to 3 crystallites;

(ii) the acid is an amphiphilic acid comprising at least one acid with 11 to 50 carbon atoms, having at least one alpha-, beta-, gamma- or delta-branch of the atom bearing the acidic hydrogen.

For the dispersions satisfying the characteristic (ii) above, the particle sizes may be less specific or different to those given for the dispersions satisfying the characteristic (i). Thus, the d_{80} , advantageously the d_{90} , of the particles consisting of aggregates of crystallites, may be no more than 10 nanometers and more particularly no more than 8 nanometers. The crystallites forming the aggregates and hence the particles have a size of no more than 5 nanometers. However, the dispersions satisfying the characteristic (ii) may possibly also have characteristics relative to the composition and size of the particles that have been mentioned previously in the case (i).

For the two cases considered and according to another variant, 80% (by weight) of the aggregates comprise 3 to 4 crystallites.

With respect more precisely to the amphiphilic acid of the characteristic (ii), this is a more specific amphiphilic acid system based on one or more acids answering to the characteristic (ii). The preferred range is from 15 to 25 carbon atoms for the acids of said amphiphilic system. To obtain better results, especially when the chain length is short (less than 14 carbon atoms), in the case of a single branch and especially if it is located in the gamma or delta position of the atom bearing the acidic hydrogen, it is highly desirable for this branch to have at least two carbon atoms, and advantageously three.

It is preferable for the longest linear portion to have at least 6, and preferably 8 carbons.

It is advantageous for the pKa of at least one of the acids to be no more than 5, preferably no more than 4.5.

It is also advantageous for the side chain(s) of the branched acids to comprise at least two carbon atoms, and preferably three carbon atoms.

Particularly advantageous acids that may be mentioned include the acids consisting of the mixture of acids known by the name of isostearic acid.

The quantity of amphiphilic acid used expressed as the number of moles of acid per mole of rare earth oxide may vary within wide limits, for example between 1/10 and 1 mol per mole of rare earth oxide. The upper bound is not critical, but it is unnecessary to use more acid. Preferably, the amphiphilic acid is used at the rate of 1/5 to 4/5 mol per mole of rare earth oxide. This molar ratio is calculated here by taking, as a mole of amphiphilic acid, the number of moles multiplied by number n of useful acidic functions. More precisely, the number of acid equivalents represents the number of molecules of acid when the acid used is monofunctional, and this number must be doubled or tripled in the case of diacids or triacids and, more generally, multiplied by the number of acidic functions in the case of a polyacid.

In this embodiment, as in the general case, the proportion between the organic phase and the amphiphilic acid or acids is not critical. The weight ratio between the organic phase and the amphiphilic acid or acids is preferably selected between 0.3 and 2.0.

The dispersions according to this second embodiment are described more particularly in EP-A-671205, of which the teaching can also be referred to.

Finally, according to a third embodiment, the dispersions may comprise particles of a rare earth compound that have been obtained by a method comprising the following steps:

- a) a solution is prepared comprising at least one soluble salt, preferably a rare earth acetate and/or chloride;
- b) the solution is contacted with a basic medium and the reaction mixture thus formed is maintained at a basic pH;
- c) the precipitate formed is recovered by spraying or freeze-drying.

The dispersions according to this third embodiment are described more particularly in EP-A-862537, the teaching of which can also be referred to.

According to the essential feature of the
5 dispersion of the invention, it contains an antioxidant. This means an agent that is capable of preventing the oxidation of organic compounds in particular, this oxidation possibly occurring for example by attack of the double or triple bonds, the
10 conjugate double bonds or the alcohol functions.

The antioxidant may be selected first from substituted derivatives of phenol, these derivatives possibly being of the monophenol or polyphenol type or of the hydroquinone type.

15 In case of derivatives of the monophenol type, these are for example products of the alkyl- or alkoxyphenol type with the formula $(R')(R)(R)\Phi(OH)$, in which R and R' are alkyl or alkoxy radicals such as tert-butyl, methyl or the methoxy radical and Φ is the
20 benzene ring.

Nonlimiting examples that may be mentioned include 2,6-di(tert-butyl)phenol, 2,6-di-tert-butyl paracresol, (or 2,6-di-tert-butyl-1-methylphenol), or 2-tert-butyl-4-methoxyphenol. Mention may also be made of octadecyl
25 3,5-di-t-butyl-4-hydroxyhydrocinnamate.

For derivatives of the polyphenol type, mention may primarily be made of bisphenols, for example 2,2-methylenebis(6-t-butyl-p-cresol), 4,4'-butylidenebis(6-t-butyl-m-cresol).

30 The polyphenols may answer in particular to the formula $(R)(OH)(CH_3)\Phi-R'-\Phi(R)(OH)(CH_3)$ in which R is an alkyl radical such as tert-butyl, R' is a radical of the $(CH_2)_n$ type such as methylene and Φ is the benzene ring. Mention may also be made of the butylated
35 product of the reaction of p-cresol with dicyclopentadiene.

With respect to hydroquinones, examples include 2,5-di-t-amylhydroquinone and t-butylhydroquinone.

The antioxidant may also be selected from aromatic amines.

Particularly worth mentioning are *p*-phenylenediamines with the formula $RHN-\Phi-NR'H$ in which
5 R is an alkyl radical such as 1,3-dimethylbutyl and R' is a phenyl radical. More particularly there may be mentioned N-phenyl-N' (1,3-dimethylbutyl)-*p*-phenylenediamine, N-phenyl-N'-isopropyl-*p*-phenylenediamine, N,N'-diphenyl-*p*-phenylenediamine, N,N'-di-*sec*-butyl-*p*-
10 phenylenediamine and the diaryl (phenyl/tolyl)-*p*-phenylenediamine mixture.

As other antioxidant amines, use can also be made of trimethyldihydroquinolines such as 6-ethoxy-2,2,4-trimethyl-1,2-dihydroquinoline or 2,2,4-trimethyl-1,2-
15 dihydroquinoline in polymerized form.

Mention may also be made of alkylated diphenylamines with the formula $R\Phi-NH-\Phi R$ in which R is an alkyl radical, for example octyl. Examples of these products include octyldiphenylamine and
20 nonyldiphenylamine.

Also suitable are the condensation products of amines and acetone and of amines and aldehydes, such as the condensation product of diphenylamine and acetone.

Finally, mention may also be made of amines like
25 *p*-anilinophenol and 4,4-di-*sec*-butylaminodiphenylmethane.

Finally, use can also be made of tocopherols as antioxidants.

Obviously, it is possible to use various
30 antioxidants in combination, particularly a combination of an agent of each of the two families given above.

The dispersions of the invention can be obtained by the addition of the antioxidant to initial dispersions like those described above. The quantity
35 of agent, expressed by the atomic ratio of antioxidant/(rare earth + element E) may be between 0.5 and 5, more particularly between 0.2 and 3, and even more particularly between 0.5 and 2.

The organic colloidal dispersions just described can be employed as diesel fuel additive for internal combustion engines, more particularly as additive for diesel fuels for diesel engines.

5 Finally, the invention relates to a fuel for internal combustion engines that contains a colloidal dispersion like the one described above. This fuel is obtained by mixing with the dispersion of the invention.

10 Examples will now be provided.

 In these examples, the colloidal dispersion used is an organic dispersion (Isopar) of cerium and iron prepared according to example 3 of WO 01/10545 with a Ce/Fe atomic ratio of 1, a cerium (metal) and iron
15 (metal) concentration of 6.5% and comprising, as antioxidant, 2,6-di-tert-butyl-4-methylphenol.

 The dispersion, containing or not containing the antioxidant, is then mixed with a diesel fuel, and this mixture is aged at various temperatures. On completion
20 of aging, the mixture is filtered and the cerium content of the liquid is measured by the inductively-coupled plasma atomic emission spectrometry (ICP-AES) technique. The apparatus used is an Ultima instrument made by Jobin and Yvon.

25 EXAMPLE 1

 This example applies to a "clear" diesel fuel sold in Sweden and comprising an OLI 9950 lubrication additive made by Octel. This diesel fuel has the following properties:

30 Sulfur content: 2 ppm
 Initial distillation point: 180°C
 Final distillation point: 285°C
 Density: 814 kg/m³
 Cetane number: 54
35 % by volume of aromatics: 4%

 The quantities of diesel fuel and dispersion are such that the initial cerium content of the mixture formed is 7 ppm. The antioxidant contents are those measured in the diesel fuel/dispersion mixture.

Table 1 below gives the results obtained.

Table 1

Aging time/temperature	Without antioxidant	With 20 ppm antioxidant	With 50 ppm antioxidant
12 h/80°C	4.7	6.9	6.2
3 h/90°C	2.7	6.9	6.4
3 h/120°C	2.0	7.0	6.8

5

It may be observed that in the absence of antioxidant, a large quantity of cerium is no longer found in the liquid phase, indicating that the cerium has largely precipitated during aging. When the antioxidant is present, on the contrary, all or nearly all the initial cerium is found, indicating that it has remained in the state of a colloidal dispersion.

EXAMPLES 2 to 8

15 These examples apply to a "clear" diesel fuel marketed in Germany and comprising various lubricants.

This diesel fuel has the following properties:

Sulfur content: 40 ppm

Initial distillation point: 180°C

20 Final distillation point: 360°C

Density: 840 kg/m³

Cetane number: 51

% by volume of aromatics: 20%

25 The respective cerium and antioxidant contents of the diesel fuel/dispersion mixture formed are respectively 7 ppm and 10 ppm.

Table 2 below gives the results obtained. The values given in the "comparative" lines correspond to the case in which the dispersion contains no antioxidant.

30

Table 2

Example	2	3	4	5	6	7	8
Quantity of lubricant (ppm)	320	200	200	290	110	300	200
Aging time/temperature							
12 h/80°C							
Comparative	0.7	4.9	4.9	0	3.7	3.4	0
Invention	6.6	6.2	7.9	6.2	6.3	7	6.2
3 h/90°C							
Comparative	0	5.75	0	0	0	0	0
Invention	7	6.7	6.1	6.4	7.4	6.3	6.3
3 h/110°C							
Comparative	0	0	0	0	0	0	0
Invention	7.0	6.8	6.0	6.5	6.2	6.7	5.0

Type of lubricant used:

5

Example 2: PC 32

Example 3: R 655

Example 4: R 639

Example 5: R 650

10 Example 6: Hitec 4848 A

Example 7: Hitec 4140 A

Example 8: Kerokor LA 99

15 Here also, it may be observed that when the antioxidant is present, most of the initial cerium is always found in the state of a colloidal dispersion, which is not the case in the absence of antioxidant.

CLAIMS

1. A colloidal dispersion comprising particles of a
5 rare earth compound, an acid and an organic phase,
characterized in that it further comprises an
antioxidant.
2. The dispersion as claimed in claim 1,
10 characterized in that the antioxidant is selected
from the substituted derivatives of phenol,
particularly alkyl- or alkoxyphenol.
3. The dispersion as claimed in claim 2,
15 characterized in that the antioxidant is selected
from 2,6-di-*tert*-butylphenol, 2,6-di-*tert*-butyl
paracresol, or 2-*tert*-butyl-4-methoxyphenol.
4. The dispersion as claimed in claim 1,
20 characterized in that the antioxidant is selected
from aromatic amines.
5. The dispersion as claimed in claim 1,
25 characterized in that the antioxidant is selected
from tocopherols.
6. The dispersion as claimed in one of the preceding
claims, characterized in that the rare earth is
30 selected from cerium, lanthanum, yttrium,
neodymium, gadolinium, and praseodymium.
7. The dispersion as claimed in one of the preceding
claims, characterized in that it comprises at
35 least one other element (E) selected from the
groups IIA, 1VA, VIIA, VIII, IB, IIB, IIIB and IVB
of the Periodic Table of the Elements.

8. The dispersion as claimed in one of the preceding claims, characterized in that the acid is an amphiphilic acid.
- 5 9. The dispersion as claimed in one of the preceding claims, characterized in that at least 90% of the particles are monocrystalline.
- 10 10. The dispersion as claimed in claim 9, characterized in that the particles have a d_{50} of between 1 and 5 nm, preferably between 2 and 3 nm.
- 15 11. The dispersion as claimed in one of claims 1 to 8, characterized in that it comprises particles not larger than 200 nm and in that it also has at least one of the following characteristics:
 - said particles are in the form of aggregates of crystallites of which the d_{80} , advantageously the d_{90} , is not more than 5 nanometers, 90% (by weight) of the aggregates comprising 1 to 5, 20 preferably 1 to 3 crystallites;
 - the acid is an amphiphilic acid comprising at least one acid with 11 to 50 carbon atoms, having at least one alpha, beta, gamma, or delta branch of the atom bearing the acidic hydrogen. 25
- 30 12. The dispersion as claimed in one of claims 1 to 8, characterized in that it comprises particles of a rare earth compound that have been obtained by a method comprising the following steps:
 - a) a solution is prepared comprising at least one soluble salt, preferably a rare earth acetate and/or chloride;
 - b) the solution is contacted with a basic medium and the reaction mixture thus formed is maintained at a basic pH; 35
 - c) the precipitate formed is recovered by spraying or freeze-drying.

13. The use of a colloidal dispersion according to any one of claims 1 to 12, as an additive for diesel fuels for internal combustion engines.
- 5 14. A fuel for an internal combustion engine, characterized in that it is obtained by mixing a colloidal dispersion according to any one of claims 1 to 12 with a conventional fuel.